

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 425 894 B1

(12)

EUROPEAN PATENT SPECIFICATION

- (45) Date of publication of patent specification: **13.04.94** (51) Int. Cl.⁵: **C08L 83/10, C08L 69/00,**
/(C08L83/10,27:00)
- (21) Application number: **90119899.4**
- (22) Date of filing: **17.10.90**

(54) **Flame retardant polycarbonate blends.**

(30) Priority: **30.10.89 US 428561**

(43) Date of publication of application:
08.05.91 Bulletin 91/19

(45) Publication of the grant of the patent:
13.04.94 Bulletin 94/15

(84) Designated Contracting States:
DE FR GB IT NL

(56) References cited:
EP-A- 0 382 004
FR-A- 2 183 234
US-A- 4 220 583
US-A- 4 391 935
US-A- 4 749 738

(73) Proprietor: **MILES INC.**
One Mellon Center
500 Grant St.
Pittsburgh, PA 15219-2502(US)

(72) Inventor: **Paul, Winfried G., Dr. Mobay**
Corp.Plast.& Rub Div.
Bldg. 8,
Mobay Road
Pittsburgh, PA 15205(US)
Inventor: **Krishnan, Sivaram**
1653 Little Meadow Road
Pittsburgh, PA 15241(US)
Inventor: **White, Roger J.**
2663 Sunnyfield Drive
Pittsburgh, PA 15241(US)

(74) Representative: **Müller, Gerhard, Dr. et al**
BAYER AG
Konzernverwaltung RP
Patente Konzern
D-51368 Leverkusen (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 425 894 B1

Description**FIELD OF THE INVENTION**

5 The present invention relates to thermoplastic molding compositions and more particularly to compositions containing a polydiorganosiloxane block copolycarbonate.

SUMMARY OF THE INVENTION

10 The present invention resides in the surprising properties found to characterize the thermoplastic molding composition which comprise a polydiorganosiloxane block copolycarbonate and an additive amount of a partially fluorinated polyolefin. The composition of the invention shows a surprising combination of improved flame retardance and high impact strength.

BACKGROUND OF THE INVENTION

Articles molded from polycarbonate resins are well known and are widely used in a variety of applications. Among their attractive properties, mention is often made of their impact strength and thermal stability. These and other properties make polycarbonate resins ideal material for the preparation of
20 business machines.

The art is noted to include U.S. Patents 4,252,916 and 4,663,391 which disclosed polycarbonate based compositions containing a partially fluorinated polyolefin. The compositions are respectively said to have improved thermal stability and improved wear resistance.

Translucent, flame-retardant polycarbonate compositions containing a salt and a partially fluorinated polyolefin have been disclosed in U.S. Patent 4,220,583. Also noted in this connection is the composition disclosed in U.S. Patent 4,749,738. Said to feature improved wear resistance, the composition contains a
25 polycarbonate resin, a polyolefin, a fluorinated polyolefin and a silicone fluid.


It is an object of the present invention to provide a thermoplastic molding composition which is characterized by its improved flame retardance and impact performance.

30

DETAILED DESCRIPTION OF THE INVENTION

The composition of the invention comprise (i) polydiorganosiloxane block copolycarbonate and (ii) an additive amount of at least one partially fluorinated polyolefin.

35 The copolycarbonate suitable in the present context conforms structurally to

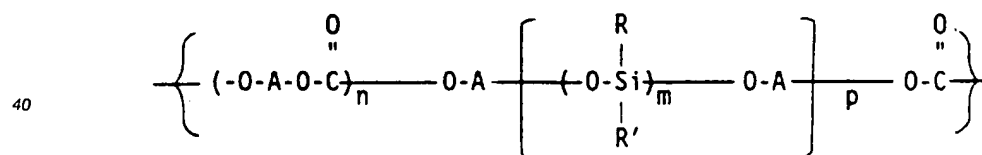


wherein n is an integer of from 1 to 1000, m is an integer of from 1 to about 500, p is an integer of about 1 to 10, A is a derivative of an aromatic dihydroxy compound and R and R' are independently a C₁-C₂₀ alkyl or a C₆-C₁₄ aryl radical, both the aryl and alkyl radicals may be substituted by halogen atoms. Most preferred R and R' radicals are selected from the group which consists of methyl, ethyl, propyl, n- and tert-butyl, chloromethyl, trifluoropropyl, phenyl, chlorophenyl and naphthyl. The block copolycarbonate of the invention comprise about 40 to 99.5, preferably 85 to 99 percent by weight of polycarbonate segments, the
50 complimentary segments being polydiorganosiloxanes.

The suitable block copolycarbonate resins are further characterized in that their relative viscosity, measured on a solution of 0.5 gm in 100 ml of dichloromethane at 25 °C, is at least 1.15, preferably from about 1.18 to about 1.38. Most preferably the polydiorganosiloxane segments which characterize the block copolycarbonates of the invention contain an average of about 5 to 200, most preferably 7 to 160 silicon
55 atoms per segment. A segment in the present context is a term used to describe a siloxane chain which is not interrupted by a carbon atom.


The derivatives of the aromatic dihydroxy compounds, -A-, include
-O-Ar-O-, or

5

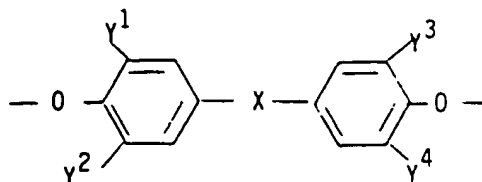

10 wherein Ar is a saturated six membered hydrocarbon ring and where X denotes a single bond, $-\text{CH}_2-$,


15



20


$-\text{O}-$, $-\text{S}-$, SO_2-
and

25



30 including substituted cycloalkylidene, or

35



40

Y^1 through Y^4 independently denote a hydrogen atom, C_1 - C_4 alkyl or a halogen atom.


Preferably -A- is derived from 2,2-bis-(4-hydroxyphenyl)-propane, 1,1-bis-(4-hydroxyphenyl)-cyclohexane, 2,2-bis-(3,5-dichloro-4-hydroxyphenyl)-propane, 2,2-bis-(3,5-dimethyl-4-hydroxyphenyl)-propane, bis-(3,5-dimethyl-4-hydroxyphenyl)-ethane, bis-(3,5-dimethyl-4-hydroxyphenyl)methane or bis-(4-hydroxyphenyl) sulphide.

The copolymer may include branching agents and/or chain stoppers both of which are known in the art. Preferred branching agents are compounds having a functionality of at least three and are described in DE-OS (German Published Specifications) 1,570,533 and 1,595,762 and in U.S. Patent 3,544,514 incorporated herein by reference. These include trihydric phenols, aromatic tricarboxylic acids and hydroxycarboxylic acids having at least three functional groups. Examples of the preferred branching agents are 2,4-bis-(4-hydroxyphenyl)-isopropyl-phenol, 2,6-bis-(2-hydroxy-5-methylbenzyl)-4-methylphenol, 2-(4-hydroxyphenyl)-2-(2,4-dihydroxyphenyl)propane, 1,4-bis-(4,4-dihydroxytriphenylmethyl)benzene, 2,4-dihydroxybenzoic acid, trimesic acid, cyanuryl chloride, 3,3-bis-(4-hydroxyphenyl)-2-oxo-2,3-dihydroindole and 3,3-bis-(4-hydroxy-3-methyl-phenyl)-2-oxo-2,3-dihydroindole.

55 The amount of branching agent is generally about 0.05 to about 2 mole percent relative to the molar amount of the dihydroxy components.

The chain stoppers suitable in the present context include radicals of phenol, benzoic acid, mono- and dialkylphenols and mono- and dialkylbenzoic acids where the alkyl substituents contain up to 20 carbon

atoms per terminal group. The preferred terminal groups conform structurally to




10 Examples of preferred chain stoppers are the radicals of phenols, p-tert.-butyl-phenol, p-tert.-octyl-phenol, p-nonyl-phenol, 3,5-di-tert.-butyl-phenol, 2-(3,5-dimethylheptyl)-phenol and 4-(3,5-dimethylheptyl)-phenol. In place of free phenols, their halocarbonates may be employed, and in place of the carboxylic acids, their acid chlorides may be employed. The amount of the terminal groups is generally about 1 to 10 mole percent relative to the molar amount of the dihydroxy compounds.

15 The preparation of the block copolycarbonates of the invention may be carried out by conventional procedures such as by the two phase interfacial process, from α,ω -bis-(hydroxyaryloxy)-polydiorganosiloxane, bisphenols, carbonic acid derivatives, such as phosgene, optionally with chain terminators and/or branching agents. Also suitable for the preparation of the block copolycarbonates are the well known transesterification process and the process in a homogeneous solution. Suitable block copolycarbonates are available in commerce such as under the trademark Makrolon, from Mobay Corporation.

Further description of block copolycarbonates suitable in the present invention may be found in U.S. Patents 3,189,662, 3,419,634, 3,821,325 and 4,584,360.

25 The partially fluorinated polyolefin of the present invention (hereinafter pf polyolefin) are well known compounds which are also commercially available, for instance under the trademark Kynar, from Pennwalt Corporation. Alternatively, these compounds may be readily prepared by known procedures. Among the suitable compounds is polyvinylidene difluoride. The pf polyolefin may advantageously be homopolymers, copolymers or terpolymers which contain a major portion of vinylidene fluoride with at least one copolymerizable monomer selected from the group consisting essentially of hexafluoropropylene, trifluoroethylene, chlorotrifluoroethylene and tetrafluoroethylene and mixtures of the homopolymer, copolymer and terpolymer. Preferably, the pf polyolefin contains at least 70 mole percent of polyvinylidene fluoride monomer units. Methods for the preparation of suitable compounds have been described in the literature including in Billmeyer, F.W. Jr., Textbook of Polymer Science, Interscience Publishers, New York, N.Y., 1966, pp. 425-427; Monermoso, J.C., Rubber Chem. Tech., 34, 1521 (1961) and Rudner, M.A., Fluorocarbons, Reinhold Publishing Corporation, New York, N.Y. The pf polyolefins conform structurally to



45 wherein R, R', R'' and R''' independently denote fluorine, hydrogen, chlorine or CF₃,

n is an integer of from 1 to 100,

m and o independently are integers of from 0 to 100 preferably 0 to 20 and

z is an integer of from 3 to 15,000

such that the number average molecular weight of the compound is greater than 20,000, preferably 30,000 to 1,000,000, as determined by gel permeation chromatography.

50 In accordance with the invention, thermoplastic molding compositions having improved impact strength and flame retardance are prepared by blending a block copolycarbonate and a pf polyolefin in an amount sufficient to improve the flame retardance of the block copolycarbonate. Preferably, the amount of added pf polyolefin is 1 to 30, more preferably 2 to 10 percent relative to the weight of the composition. The preparation of the composition of the invention is carried out using conventional means and following conventional procedures for the preparation of homogeneous blends and molding compositions known in the thermoplastic art.

Customary additives may be added to the composition of the invention for their art recognized functions. These include dye stuff, pigments, hydrolysis stabilizers, thermal stabilizers and UV stabilizers. Fillers, reinforcing agents, flame retardants and mold release agents may also be incorporated in the composition. The composition of the invention may be used in all applications where conventional polycarbonate based compositions have been used and where in addition there is an advantage needed in terms of improved flame retardance with no loss in impact strength.


In the following examples, the homopolycarbonate resin which was used for the purpose of comparison was Makrolon which has a relative solution viscosity of 1.255. The block copolycarbonate was characterized in that its siloxane content was about 5% and that it had about 80 silicon atoms per segment. Its relative viscosity was 1.265. The partially fluorinated polyolefin was polyvinylidene difluoride. The table below summarizes the results of the comparisons between the composition of the invention and other compositions which are not of the invention.

Example	A	B	C	D	E	F
Homopolycarbonate, %	100	--	97.5	50.0	--	95.0
Block copolycarbonate, %	--	100	--	50.0	95.0	--
Pf-polyolefin, %	--	--	2.5	--	5.0	5.0
Impact Strength						
Izod, Notched, J/m						
@ 1/8" = 0.317 cm	753	802	666	796	764	605
@ 1/4" = 0.635 cm	108	667	128	690	606	318
Flame retardance, per UL 94 1/8" = 0.317 cm	V-2	V-1	V-2	fail	V-0	fail

As is clear from the above results, the flame retardance of the block copolymer of the invention, V-1 is improved upon the incorporation of the pf polyolefin of the invention therewith. The flame retardance of the composition is V-0, a performance which could not have been predicted based on the prior art. The prior art composition, represented by Examples C and F demonstrate that the addition of a pf polyolefin to a homopolycarbonate does not bring about an improvement in the flame retardance of the resin. While the homopolycarbonate has a V-2 rating, the prior art composition fails the UL-94 test (Example F) or in the case of Example C, does not improve the rating at all. The results above also demonstrate that the impact performance of the composition of the invention, Example E, has a level of impact strength which is higher than the corresponding prior art composition - Example F. The substantial retention of the impact strength of the composition of the invention as compared to the impact strength of the unmodified block copolycarbonate, compare Examples E and B, is an unexpected advantage in view of the significant deterioration in strength which characterize the prior art compositions - Examples C and F - in comparison to the strength of the unmodified homopolycarbonate, Example A.


Claims

1. A thermoplastic molding composition comprising a homogeneous blend of
 - (i) a block copolycarbonate conforming structurally to

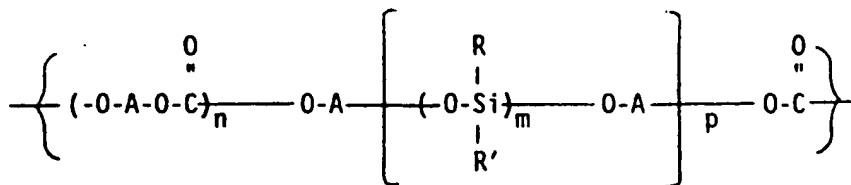

wherein n is an integer of 1 to 1000, m is an integer of 1 to 500, p is an integer of 1 to 10, A is a derivative of an aromatic dihydroxy compound, R and R' are C₁-C₂₀ alkyl or C₆-C₁₄ aryl radical, said copolycarbonate contains from 40 to 99.5 wt-% of polycarbonate segments and has a relative viscosity, measured on a solution of 0.5 g in 100 ml of dichloromethane at 25 °C, of at least 1.15, and

(ii) an additive amount of a partially fluorinated polyolefin conforming structurally to

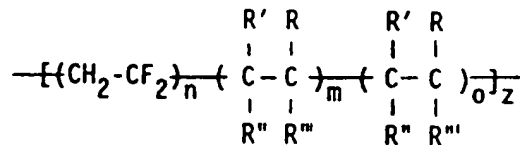

wherein R, R', R'' and R''' independently denote fluorine, hydrogen, chlorine or CF₃,

n is an integer of from 1 to 100,

m and o independently are integers of from 0 to 100,

z is an integer of from 3 to 15,000

such that the number average molecular weight of the compound is greater than 20,000, as determined by gel permeation chromatography, said additive amount being sufficient to improve the flame retardance of said block copolycarbonate.

2. The composition of Claim 1 wherein said additive amount is 1 to 30 percent relative to the weight of said blend.


3. The composition of Claim 1 wherein said additive amount is 2 to 10 percent relative to the weight of said blend.

4. The composition of Claim 1 wherein said partially fluorinated polyolefin is polyvinylidene difluoride.

Patentansprüche

1. Thermoplastische Formmasse, umfassend ein homogenes Gemisch aus

(i) einem Block-Copolycarbonat entsprechend der Struktur

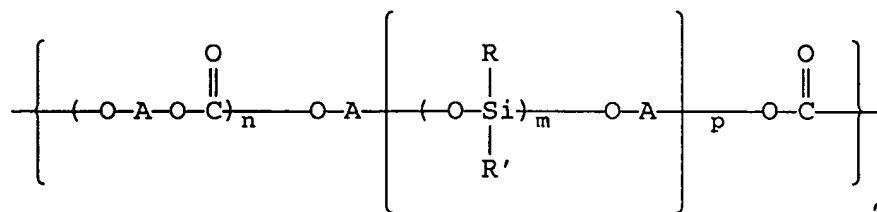

in der

n eine ganze Zahl von 1 bis 1000 ist,

m eine ganze Zahl von 1 bis 500 ist,


p eine ganze Zahl von 1 bis 10 ist,

A ein Derivat einer aromatischen Dihydroxy-Verbindung ist,

R und R' jeweils ein C₁-C₂₀-Alkyl- oder ein C₆-C₁₄-Aryl-Rest sind,

wobei das Copolycarbonat 40 bis 99,5 Gew.-% Polycarbonat-Segmente enthält und eine relative Viskosität, gemessen an einer Lösung von 0,5 g in 100 ml Dichlormethan bei 25 °C, von wenigstens 1,15 hat, und

(ii) einer zugesetzten Menge eines partiell fluorierten Polyolefins entsprechend der Struktur

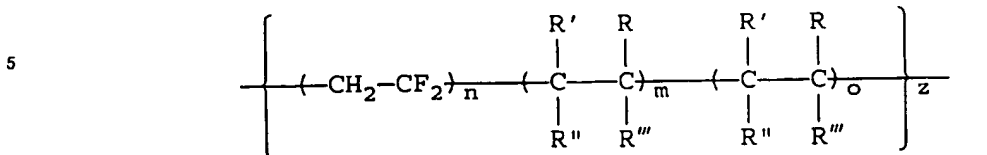

in der

R, R', R'' und R''' unabhängig voneinander Fluor, Wasserstoff, Chlor oder CF₃ bezeichnen,

n eine ganze Zahl von 1 bis 100 ist,

m und o unabhängig ganze Zahlen von 0 bis 100 sind,

z eine ganze Zahl von 3 bis 15 000 ist,

in solcher Weise, daß das Zahlenmittel des Molekulargewichts der Verbindung, bestimmt durch Gelpermeations-Chromatographie, größer als 20 000 ist, wobei die zugesetzte Menge ausreicht, um die flammhemmenden Eigenschaften des Block-Copolycarbonats zu verbessern.


2. Masse nach Anspruch 1, worin die zugesetzte Menge 1 bis 30 %, bezogen auf das Gewicht des Gemischs, beträgt.

3. Masse nach Anspruch 1, worin die zugesetzte Menge 2 bis 10 %, bezogen auf das Gewicht des Gemischs, beträgt.

4. Masse nach Anspruch 1, worin das partiell fluorierte Polyolefin Polyvinylidendifluorid ist.


Revendications

1. Composition thermoplastique à mouler, comprenant un mélange homogène
(i) d'un copolycarbonate séquencé répondant à la formule structurale

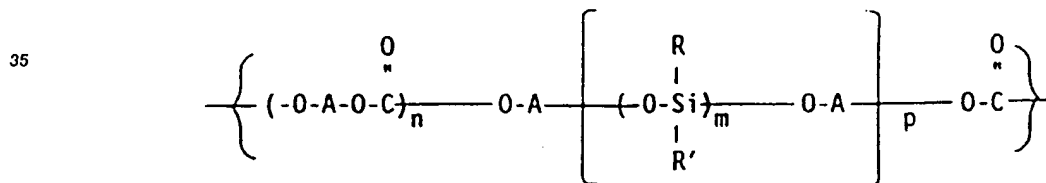

dans laquelle n représente un nombre entier de 1 à 1000, m représente un nombre entier de 1 à 500, p représente un nombre entier de 1 à 10, A représente un dérivé d'un composé dihydroxylique aromatique, R et R' représentent des radicaux alkyle en C₁ à C₂₀ ou aryle en C₆ à C₁₄, ledit copolycarbonate contenant 40 à 99,5 % en poids de segments polycarbonate et possédant une viscosité relative, mesurée sur une solution de 0,5 g dans 100 ml de dichlorométhane à 25 °C, au moins égale à 1,15, et

(ii) d'une quantité à effet d'additif d'une polyoléfine partiellement fluorée répondant à la formule structurale



dans laquelle R, R', R'' et R''' représentent indépendamment le fluor, l'hydrogène, le chlore ou CF₃,

n représente un nombre entier de 1 à 100,

m et o représentent indépendamment des nombres entiers de 0 à 100,

z représente un nombre entier de 3 à 15 000,

5 de telle sorte que la moyenne numérique du poids moléculaire du composé soit supérieure à 20 000, telle qu'elle est déterminée par chromatographie de perméation sur gel, ladite quantité à effet d'additif étant suffisante pour améliorer le pouvoir retardateur de flamme dudit copolycarbonate séquencé.

10 2. Composition suivant la revendication 1, dans laquelle la quantité à effet d'additif est comprise dans l'intervalle de 1 à 30 pour cent, par rapport au poids du mélange.

3. Composition suivant la revendication 1, dans laquelle la quantité à effet d'additif est comprise dans l'intervalle de 2 à 10 pour cent, par rapport au poids du mélange.

15 4. Composition suivant la revendication 1, dans laquelle la polyoléfine partiellement fluorée est un polymère de difluorure de vinylidène.

20

25

30

35

40

45

50

55